

RANSBURG VECTOR SOLO AA90

Air Assisted Airless cordless, accurate and efficient

Ransburg®



The Vector Solo AA combines air-assisted airless technology with proven atomisation in a portable, cordless model. With superior Ransburg electrostatics, this gun delivers advanced spray pattern characteristics, unmatched pattern adjustability and extraordinary transfer efficiency.

Enhanced spray pattern characteristics deliver precise and consistent application of solvent based coatings. The Vector Solo AA's pattern adjustability allows the decrease of overall pattern size, improving accuracy and creating a uniform finish. Ransburg's best in-class atomisation also reduces overspray and paint waste for cost savings.

Solo's cordless design increases flexibility. Operators have a greater range of movement to achieve consistent applications. The superior ergonomic balance improves user comfort and lessens fatigue for an increase in productivity.

Vector Solo AA's efficiency, convenience and versatility helps to lower paint usage and contribute to reduced running costs in finishing facilities.

Solo sprays anywhere without electric cables for improved mobility.

Typical applications

- Aerospace industry
- General Metal spraying
- Commercial and off Road Vehicles
- Plus many others...

Balanced Electrode Design... provides the best transfer efficiency in the industry

Ergonomic Handle Contouring... proper palm engagement reduces the grip force required to hold the gun over extended use

Low Trigger Pull Force... improves user comfort and reduces fatigue

Easily Maintained... modular design makes it easy to repair and replace components, if needed

Low Motor Speed... minimises the potential for vibration transmitted to the handle for a secure grip

Single Turn Fan Pattern Adjustment... reduces overall pattern size by 30%

CE marked and fully ATEX approved.

**VECTOR
SOLO**

finishingbrands.eu



Accessories


- Applicator Covers
- Air Caps provide a wide range of fan widths
- Pre-Orifice Seals
- Test Equipment
- High Pressure Whip Hose
- Gasket Kit
- Atomisation Compensation Valve

79698 Vector Solo AA90

Applicator Model Identification

When ordering, use 79698-A, B, C, D and E as indicated.

Five digits must follow the basic part number. For example: 79698-20200

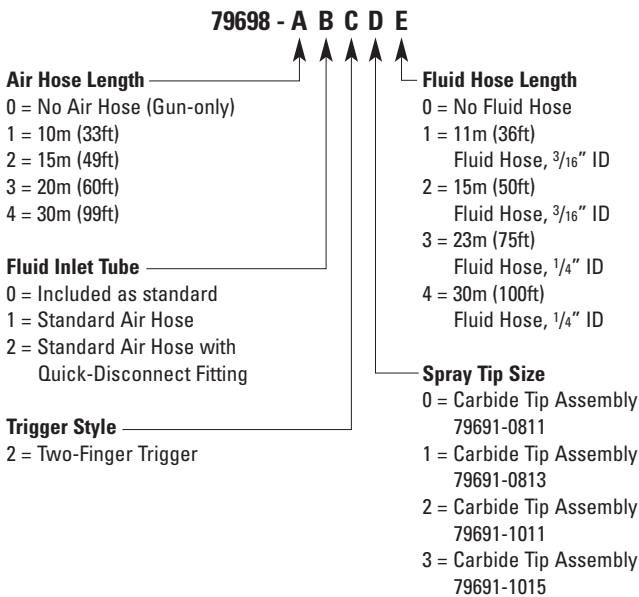

LED Style Voltage Light...
simple and easy to read
indicator light located in
the rear of the gun



High-Low Quick Voltage Setting...
easy switching for targets with
recessed areas

Adjustable Voltage
Range... 60 or 85 kV

Cordless Portability... greatly reduces
installation and removal time

Specifications	
Length	269mm / 10.6 in
Weight	973g / 34.0 oz
Hose Lengths	10m, 15m, 20m, 30m

Electrical	
Operating Voltage	85kV DC (-) Max
Current Output	130 Microamps Max
Paint Resistance	.1M Ohm to Infinity

Mechanical	
Fluid Flow Capability	1500ml/min
Operating Pressure	Fluid 0-270bar / 0-3000psi – nozzle / material dependant Air 0-6.9bar / 0-100psi
Ambient Temperature	0-40°C / 32-104°F
Consumption	470 SLPM / 16.6 SCFM @ 2.8bar / 40psig @ the handle inlet
Sound Level	92dB(A) @ 2.8bar / 40psi @ the handle, 1m from the applicator
Vibration Level	.0065m/S2 @ 2.8bar / 40psi @ the handle inlet

For further technical information refer to the Solo AA90 Service Bulletin

**Sales and Service through our
Global Network of Industrial Distributors**

Finishing Brands Locations

- Americas: **USA** ▪ **Mexico** ▪ **Brazil**
 Europe/Asia/Africa: **United Kingdom** ▪ **France** ▪ **Germany**
 Pacific Rim: **China** ▪ **Japan** ▪ **Australia**

Ransburg®

www.finishingbrands.eu

email: marketing@finishingbrands.eu

